

EXELTRONIC XXL

DELAYED MODULE

- ➔ Activation by a button with 2 NC contacts
- ➔ Self-control of this button
- ➔ Compatible with the safety switches equipped with Acotom® process
- ➔ 3 NO instantaneous lines for engine control or heating resistances
- ➔ 2NO+1NC delayed lines
- ➔ Delaying time adjustable by incremental coders from 0 to 999s
- ➔ Power supply : 24Vac/dc

SAFETY CATEGORY

EXELTRONIC XXL(V) : category 4 according to EN 954-1

8A/250V
8A/50Vdc

DIGITAL
PROCESS

PROTECTION
DLC


0~999s
DELAYING

PLUG IN
TERMINALS

VISUALIZATION
BY LED




WIRING DIAGRAM

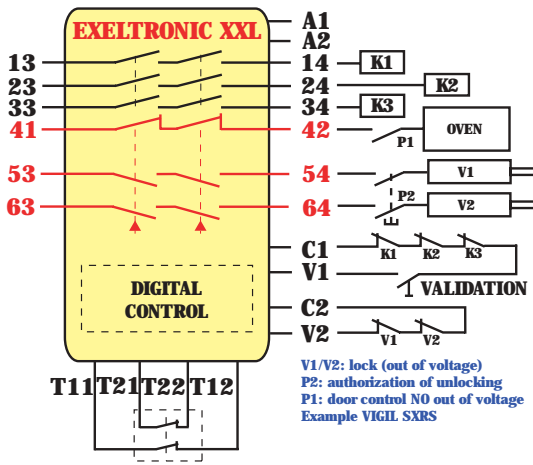

INTERLOCKING WITH DELAYED
OPENING.
OVENS, INERTIA MACHINES ...

cat.4


DIMENSIONS

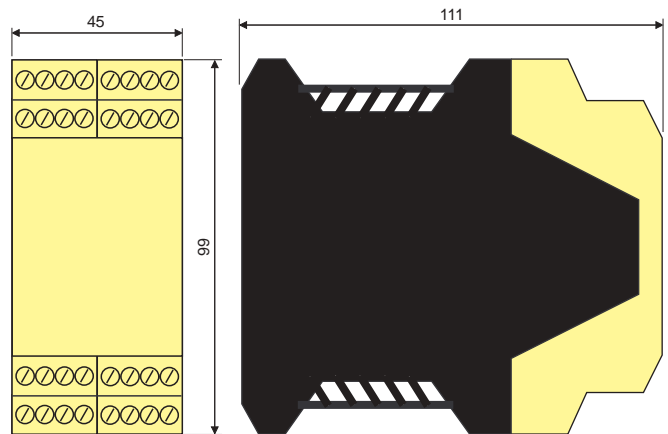

Rising time drift in case of failure which guarantees the access locking.

advice

With the Exeltronic you can maintain the deceleration of an engine by means of a frequency variator and after a chosen time, you can unlock your access securely.

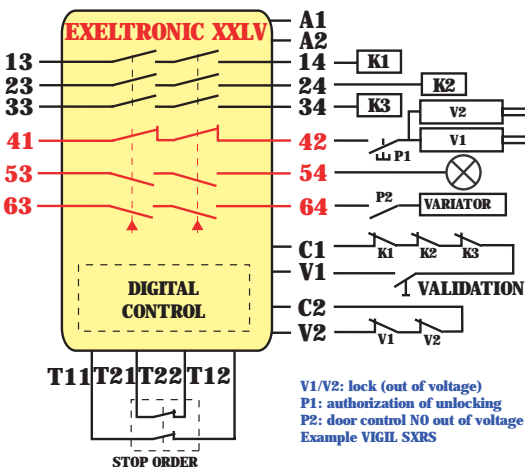

VARIATOR CONTROL

cat.4