


# 150 LED Buzzer Combination

## Technical specifications

<b>Dimensions</b> (Diameter x Height):	49,5 mm x 74 mm
<b>Dome:</b>	PC, transparent
<b>Fixing :</b>	Installation mounting for Ø 22.5 mm (M 22) with anti-twist device
<b>Housing :</b>	PC/ABS-Blend
<b>Connection:</b>	Connector plug with screwable connection max. 1.5 mm <sup>2</sup>
<b>Protection rating:</b>	IP 65
<b>Current consumption:</b>	< 50 mA at 24 V < 20 mA at 115 and 230 V
<b>Starting current:</b>	< 0,5 A
<b>Volume :</b>	80 dB
<b>Duty cycle:</b>	100 % ED
<b>Audio frequency:</b>	2,8 kHz
<b>Tone type:</b>	Continuous tone
<b>Life duration:</b>	up to 50000 h

## Technical Diagrams

### 150 LED Buzzer Combination

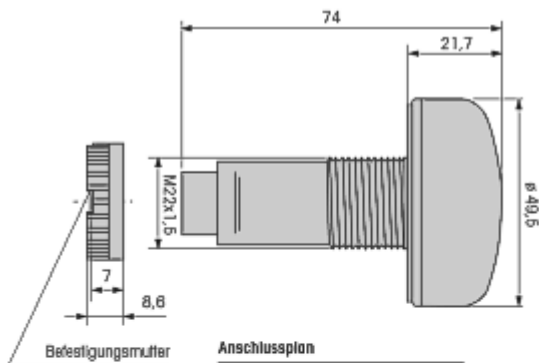

Anschlussplan	
X1 & X3	keine Funktion
X2 & X3	Licht
X1, X2 & X3	Licht + Summer

